



DSC*

DIRECTIONAL CONTROL VALVE, DIRECT OPERATED, HYDRAULICALLY ACTUATED

SUBPLATE MOUNTING


DSC3 ISO 4401-03

DSC5 ISO 4401-05

p max (see performances table)

Q nom (see performances table)

OPERATING PRINCIPLE

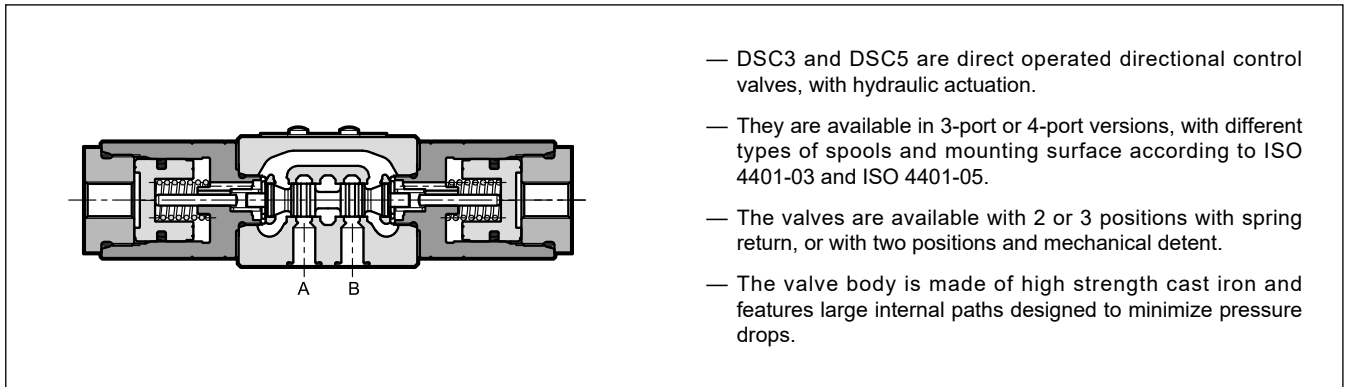

- DSC3 and DSC5 are direct operated directional control valves, with hydraulic actuation.
- They are available in 3-port or 4-port versions, with different types of spools and mounting surface according to ISO 4401-03 and ISO 4401-05.
- The valves are available with 2 or 3 positions with spring return, or with two positions and mechanical detent.
- The valve body is made of high strength cast iron and features large internal paths designed to minimize pressure drops.

PERFORMANCES

(measured with mineral oil of viscosity 36cSt at 50°C)

		DSC3	DSC5
Maximum working pressure:			
- P- A - B ports	bar	350	320
- T port		25	25
Pilot pressure		15 (NOTE)	
- min	bar	210	
- max			
Nominal flow rate	l/min	75	150
Ambient temperature range	°C	-20 / +60	
Fluid temperature range	°C	-20 / +80	
Fluid viscosity range	cSt	10 ÷ 400	
Fluid contamination degree	According to ISO 4406:1999 class 20/18/15		
Recommended viscosity	cSt	25	
Mass: single operator	kg	1.3	3.6
dual operator		1.7	4.2

NOTE: The pilot pressure must be at least 15 bar higher than the backpressure on the T line: to allow the spool to quickly return to the central position, the pilot pressure must drop rapidly to 0 bar.

The return spring of the plunger generates a minimum backpressure of 0.5 bar on the pilot line.

1 - IDENTIFICATION CODE

<div style="display: flex; justify-content: space-around; font-weight: bold; font-size: 1.2em;"> DSC-/ </div>	<p>Directional valve with spool</p> <p>Hydraulically actuated</p> <p>Size: 3 = ISO 4401-03 5 = ISO 4401-05</p> <p>Spool type (see point 4) RK, RK1, TA02 and TB02 spools are available for DSC3 valve only.</p> <table style="font-weight: bold; font-size: 0.8em;"> <tr> <td>S*</td><td>TA</td><td>TA*</td></tr> <tr> <td>SA*</td><td>TB</td><td>TB*</td></tr> <tr> <td>SB*</td><td>RK</td><td>RK1</td></tr> </table> <p>NOTE: The standard valve is supplied with surface treatment of phosphating black. The zinc-nickel finishing on the valve body makes the valve suitable to ensure a salt spray resistance up to 600 hours. (test operated according to UNI EN ISO 9227 standards and test evaluation operated according to UNI EN ISO 10289 standards).</p>	S*	TA	TA*	SA*	TB	TB*	SB*	RK	RK1
S*	TA	TA*								
SA*	TB	TB*								
SB*	RK	RK1								


Option:
/ W7 = Zinc-nickel surface treatment (see **NOTE**)
 Omit if not required

Seals:
N = NBR seals for mineral oil (**standard**)
V = FPM seals for special fluids


Series No.:
12 for DSC3 (the overall and mounting dimensions remain unchanged from 10 to 19)
10 for DSC5 (the overall and mounting dimensions remain unchanged from 10 to 19)

2 - MOUNTING SURFACES

DSC3

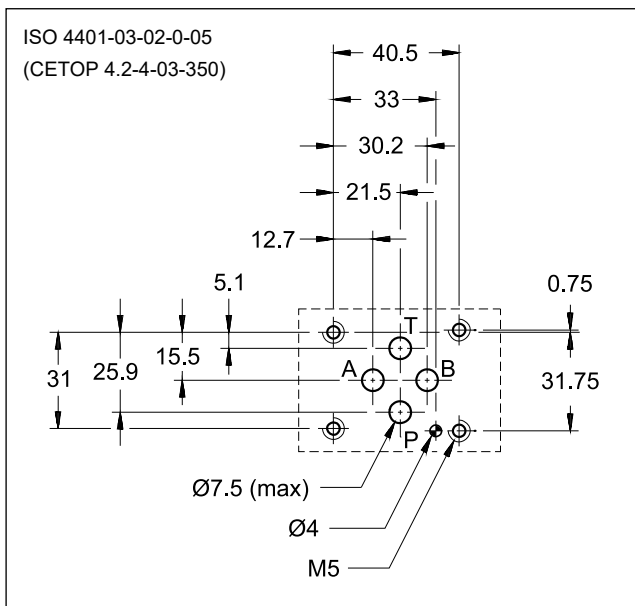

DSC5

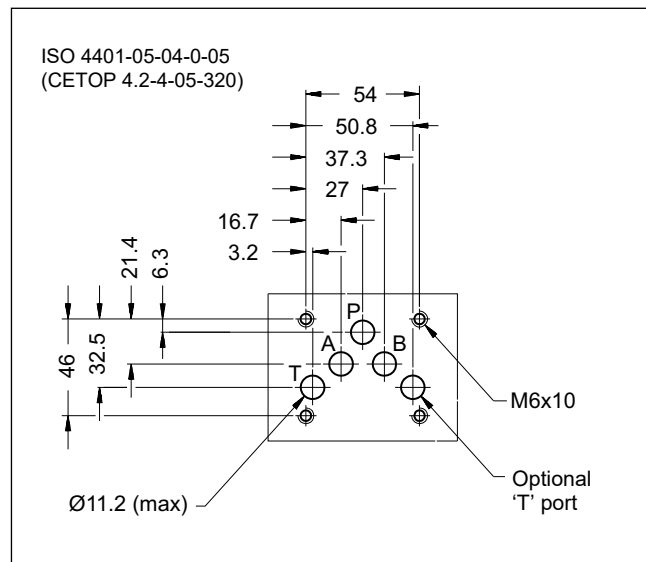


3 - HYDRAULIC FLUIDS

Use mineral oil-based hydraulic fluids HL or HM type, according to ISO 6743-4. For these fluids, use NBR seals (code N). For fluids HFDR type (phosphate esters) use FPM seals (code V).

For the use of other fluid types such as HFA, HFB, HFC, please consult our technical department. Using fluids at temperatures higher than 80 °C causes a faster degradation of the fluid and of the seals characteristics. The fluid must be preserved in its physical and chemical characteristics.

4 - SPOOL TYPES


RK, RK1, TA02 and TB02 spools are available for DSC3 valve only.

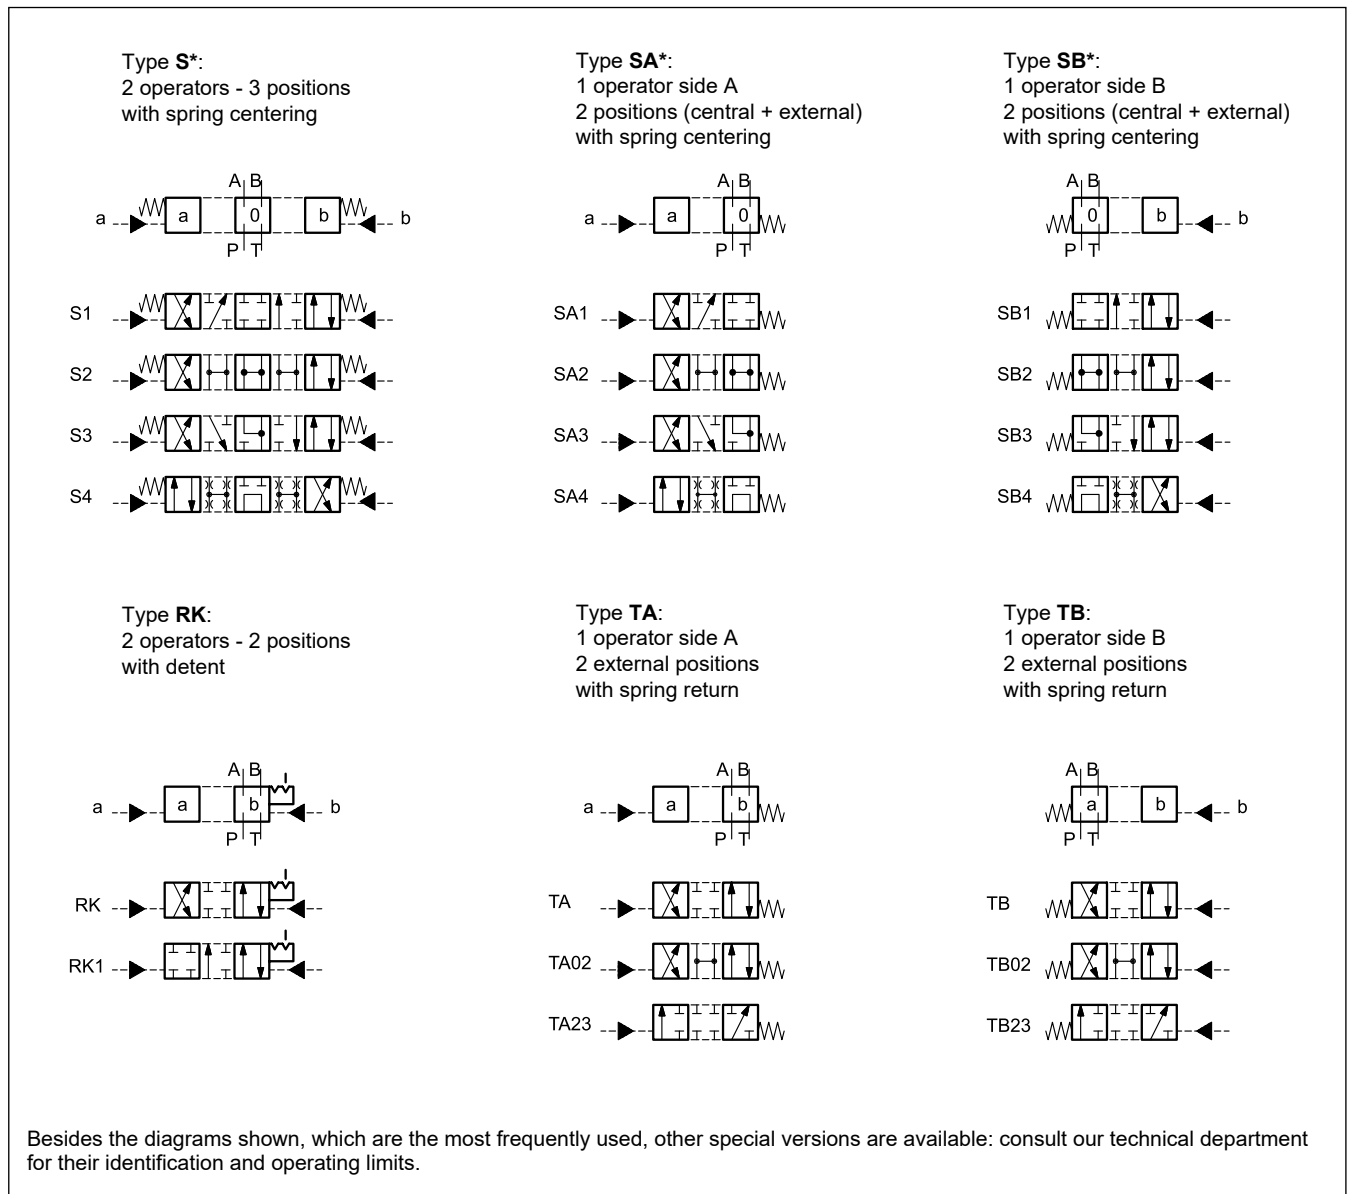

5 - PRESSURE DROPS $\Delta P-Q$

(values obtained with viscosity 36 cSt at 50 °C)

5.1 - DSC3

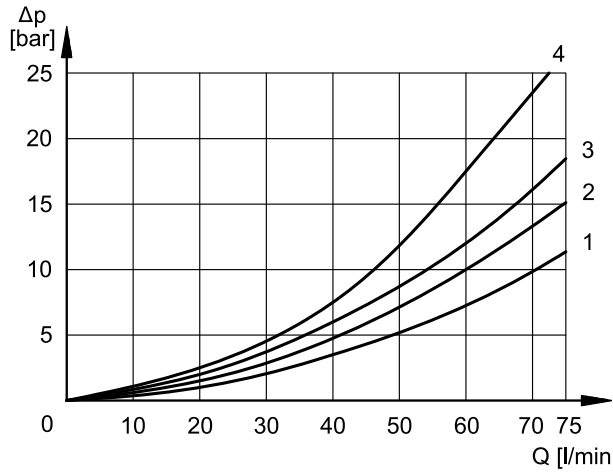


PRESSURE DROPS WITH ACTUATED VALVE

SPOOL TYPE	FLOW DIRECTION			
	P→A	P→B	A→T	B→T
	CURVES ON GRAPH			
S1, SA1, SB1	2	2	3	3
S2, SA2, SB2	1	1	3	3
S3, SA3, SB3	3	3	1	1
S4, SA4, SB4	4	4	4	4
TA, TB	3	3	3	3
TA02, TB02	2	2	2	2
TA23, TB23	3	3		
RK, RK1	2	2	2	2

PRESSURE DROPS WITH VALVE IN CENTER POSITION

SPOOL TYPE	FLOW DIRECTION				
	P→A	P→B	A→T	B→T	P→T
	CURVES ON GRAPH				
S2, SA2, SB2					2
S3, SA3, SB3			3	3	
S4, SA4, SB4					3

5.2 - DSC5

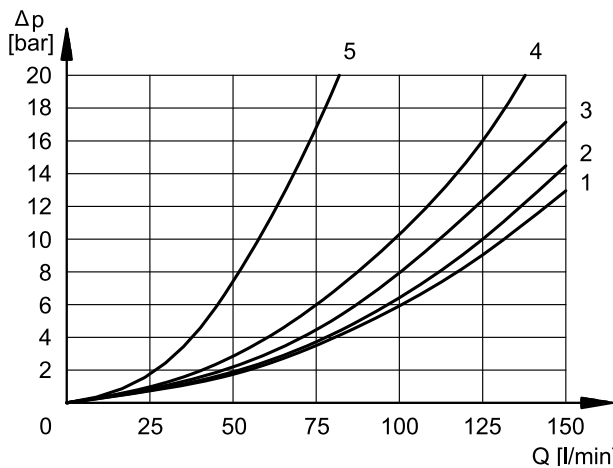

PRESSURE DROPS WITH ACTUATED VALVE

SPOOL TYPE	FLOW DIRECTION			
	P→A	P→B	A→T	B→T
	CURVES ON GRAPH			
S1, SA1, SB1	2	2	1	1
S2, SA2, SB2	3	3	1	1
S3, SA3, SB3	3	3	2	2
S4, SA4, SB4	1	1	2	2
TA, TB	3	3	2	2
TA23, TB23	4	4		

PRESSURE DROPS WITH VALVE IN CENTER POSITION

SPOOL TYPE	FLOW DIRECTION				
	P→A	P→B	A→T	B→T	P→T
	CURVES ON GRAPH				
S2, SA2, SB2					4
S3, SA3, SB3			5	5	
S4, SA4, SB4					4


6 - OPERATING LIMITS

The curves define the flow rate operating range based on the valve pressure for the different versions.

The values have been obtained according to ISO 6403 standard, with mineral oil viscosity 36 cSt at 50 °C and filtration according to ISO 4406:1999 class 18/16/13.

NOTE: The values shown in the graphs refer to the standard valve. Operating limits may be significantly reduced using a 4-port valve with port A or B plugged or without flow.


6.1 - DSC3

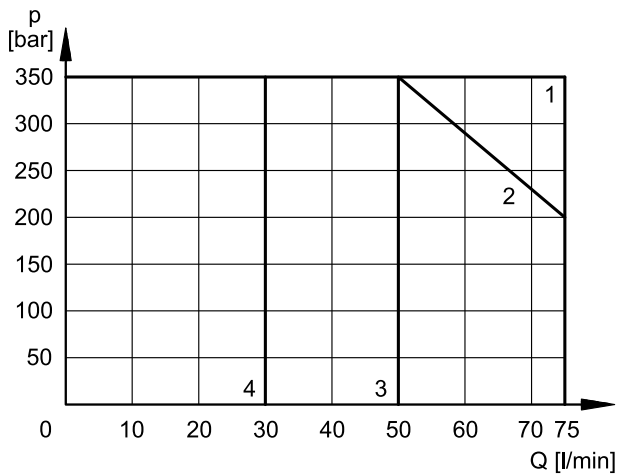

SPOOL TYPE	CURVE	
	P→A	P→B
S1, SA1, SB1	2	2
S2, SA2, SB2	3	3
S3, SA3, SB3	2	2
S4, SA4, SB4	3	3

SPOOL TYPE	CURVE	
	P→A	P→B
TA, TB	2	2
TA02, TB02	3	3
TA23, TB23	2	2
RK	4	4
RK1	1	1

6.2 - DSC5

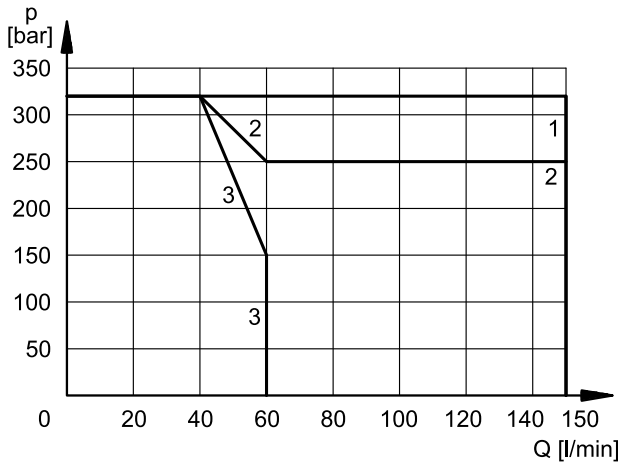




SPOOL TYPE	CURVE	
	P→A	P→B
S1, SA1, SB1	1	1
S2, SA2, SB2	1	1
S3, SA3, SB3	2	2
S4, SA4, SB4	3	3

SPOOL TYPE	CURVE	
	P→A	P→B
TA, TB	1	1
TA23, TB23	2	2

7 - DSC3 - OVERALL AND MOUNTING DIMENSIONS


dimensions in mm

DSC3-S*
DSC3-RK
DSC3-RK1

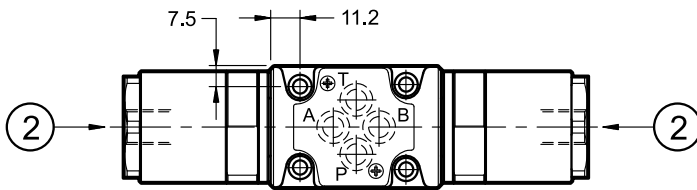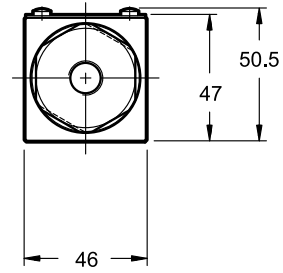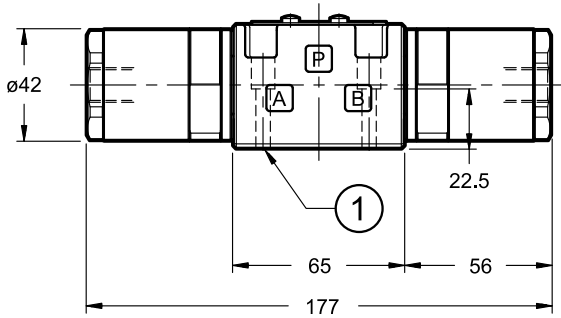

DSC3-SA*
DSC3-TA
DSC3-TA*

operator position for configuration type
SB*, TB, TB02 and TB23

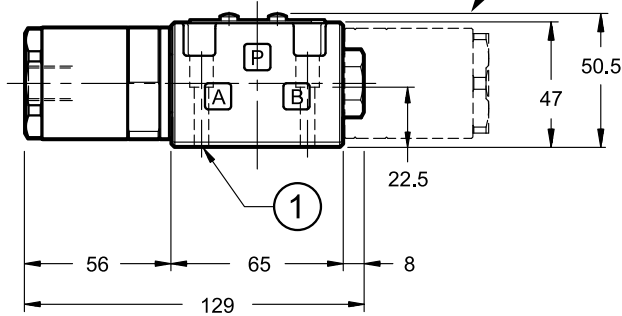

Valve fastening: 4 SHC screws ISO 4762 M5x30


Tightening torque: 5 Nm (screws A8.8)

Threads of mounting holes: M5x10

1 Mounting surface with sealing rings:
N. 4 OR type 2037 (9.25x1.78) - 90 Shore

2 1/4" BSP connection for hydraulic actuation


8 - DSC5 - OVERALL AND MOUNTING DIMENSIONS

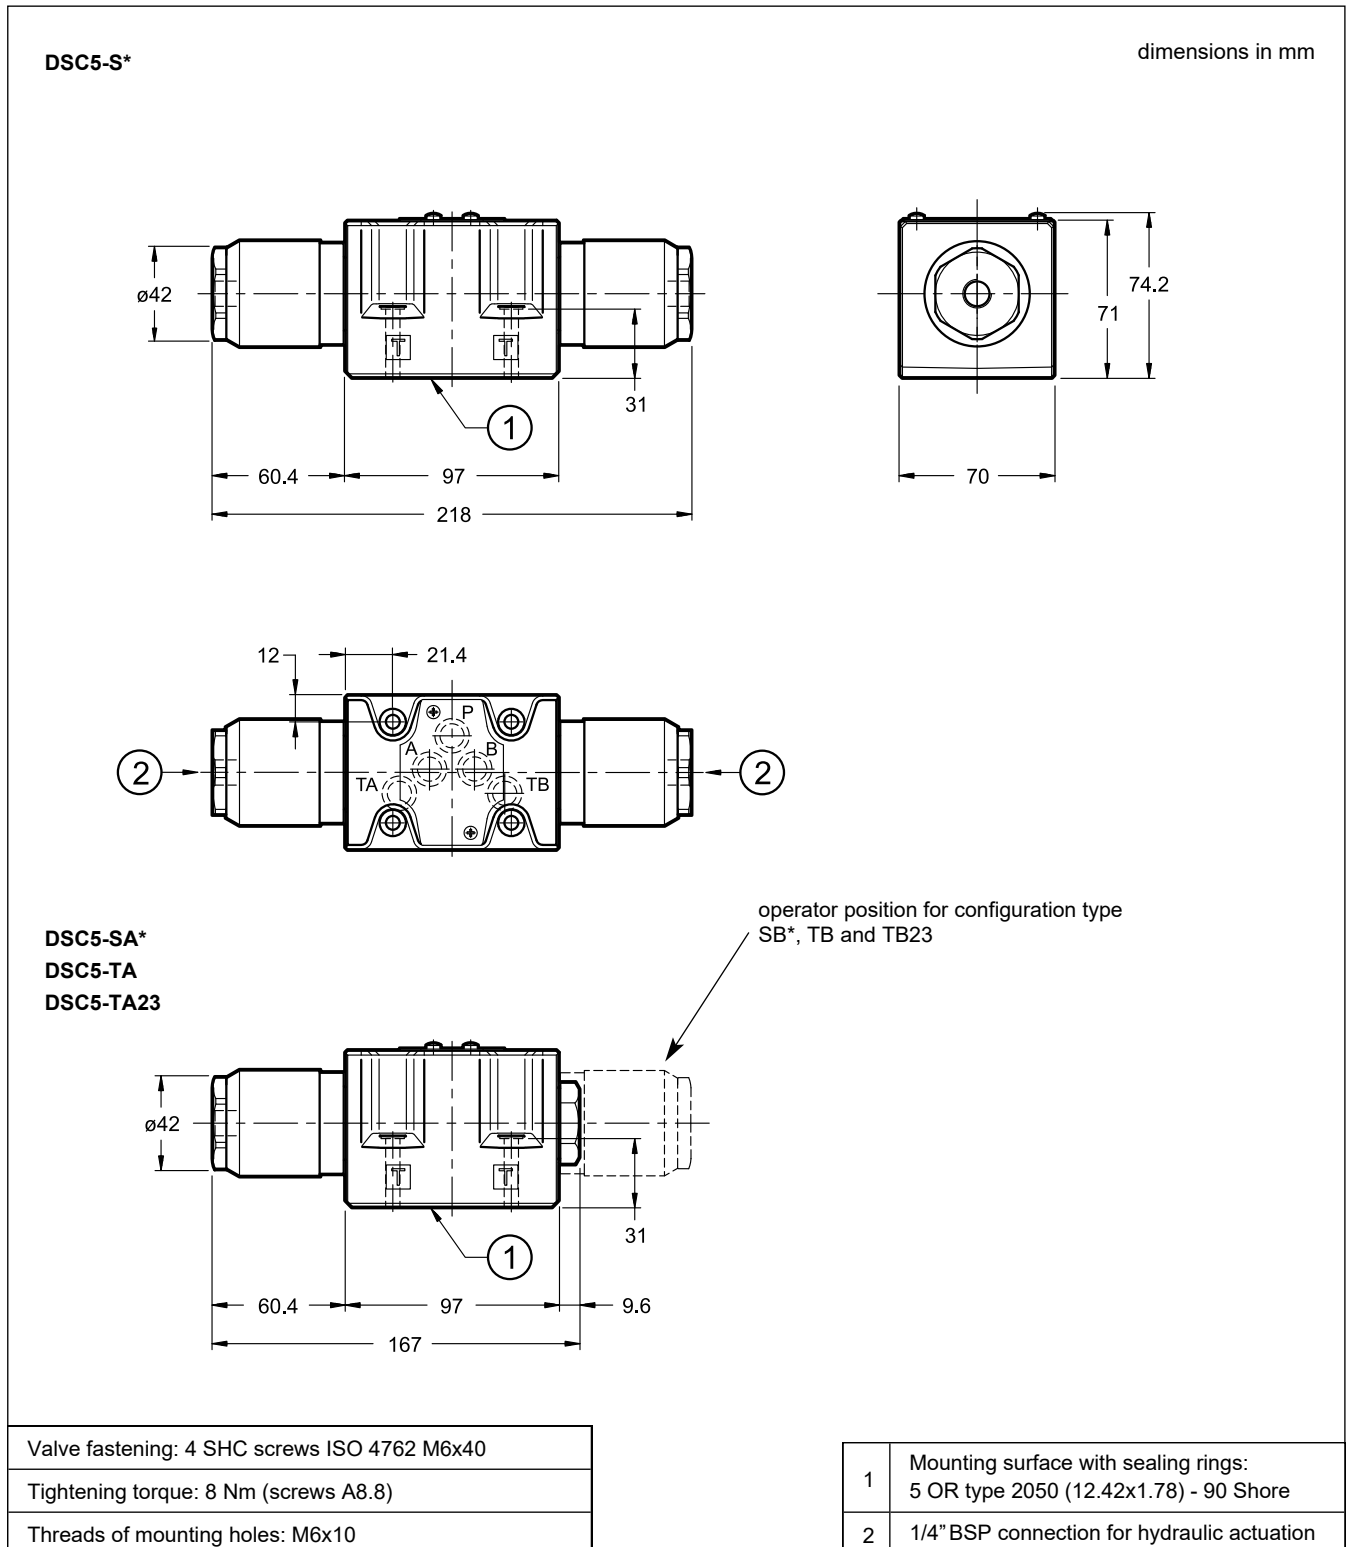

9 - INSTALLATION

Configurations with centering and return springs can be installed in any position; RK type valves - without springs and with mechanical detent - must be mounted with the longitudinal axis horizontal.

Valve fixing is by means of screws or tie rods, with the valve mounted on a lapped surface, with values of planarity and smoothness that are equal to or better than those indicated in the drawing. If the minimum values of planarity and/or smoothness are not met, fluid leakage between valve and mounting surface can easily occur.

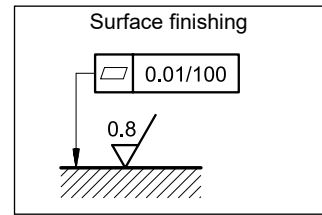

10 - SUBPLATES

(see cat. 51 000)

	DSC3	DSC5
With rear ports	PMMD-AI3G	PMD4-AI4G - thread 3/4" BSP
Type with side ports	PMMD-AL3G	PMD4-AL4G - thread 1/2" BSP
Thread of ports P, T, A, B	3/8" BSP	